

Morsetti per C.S.
carrello

A1 Terminal blocks for P.C.B.
rising clamp

Blocs de jonction C.I.
étrier remontant

Printklemmen
Liftprinzip

Passo Pas	Pitch Rastermaß	mm
Tensione nominale Tension nominale	Rated Voltage Bemessungsspannung	V
Corrente nominale Intensité nominale	Rated Current Bemessungsstrom	A

Tipo cavi Type du conducteur	Types of cables Leitungstypen	
Sezione nominale Section nominale	Nominal cross section Nennquerschnitt	mm² AWG
Lunghezza spelatura Longueur de dénudage	Stripping length Abisolierlänge	mm
Coppia di torsione Couple de serrage	Torque Drehmoment	Nm Lb-in
Temperatura Température	Temperature Temperatur	°C
Corpo isolante Corps isolant	Housing Isolierkörper	
Vite imperdibile Vis imperdable	Captive screw Unverlierbare Schraube	
		mm

	IMQ	EN60998
	VDE	EN60998
	UL	UL1059
	cUL	UL1059 + C22.2 n°158

Poli Pôles	Poles Polzahl	X ➡
Colore standard Coloris standard	Standard colour Standardfarbe	Y ➡
Altri dati Autres données	Other information Weitere Informationen	pag. Seite

Ordinazione Référence de commande		How to order Bestellschlüssel			
MRT5		P5 / X	SQ	Y	...
Tipo Type Type	Passo Pitch Pas	Poli Poles Pôles	Versione Version Version	Colori Colors Couleurs	Numerazione Printing Marquage
				Farben	Bedruckung

Altri colori a richiesta. Other colours on demand.
Autres couleurs sur demande. Andere Farben bei Bedarf.

VE GR NE AR BL RO

MRT5


Modulo componibile
Elements modulaires

Interlocking modules
Zusammensteckbare Blöcke

Poli
Pôles

Poles
Polzahl

2/3


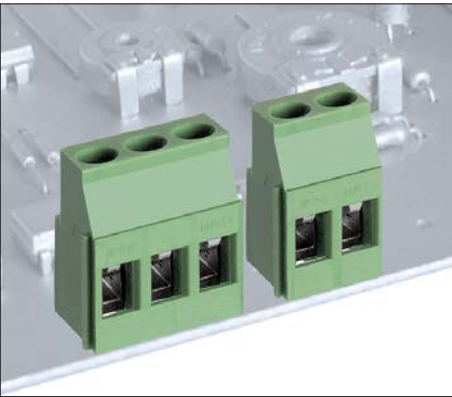


5	5,08
320	
24	

		
0,2 ÷ 4 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
6		
0,5	5	
110		
PA - UL 94 V0		
M3		
	0,6 x 3,5	

V	A	mm²/AWG
450	24	0,5 ÷ 2,5
450	24	0,5 ÷ 2,5
300	16	24 ÷ 12

min 2 - max ...		
VE		
73		

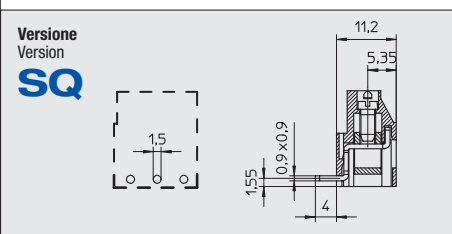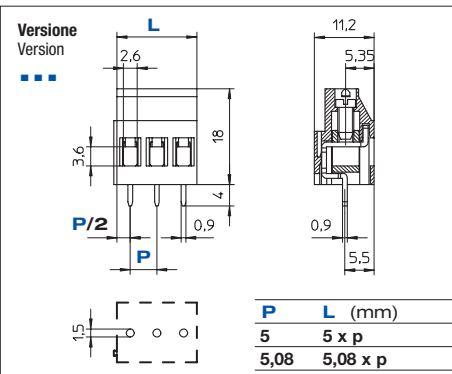

MRT5..DP


Modulo componibile
Elements modulaires

Interlocking modules
Zusammensteckbare Blöcke

Poli
Pôles

Poles
Polzahl

2/3

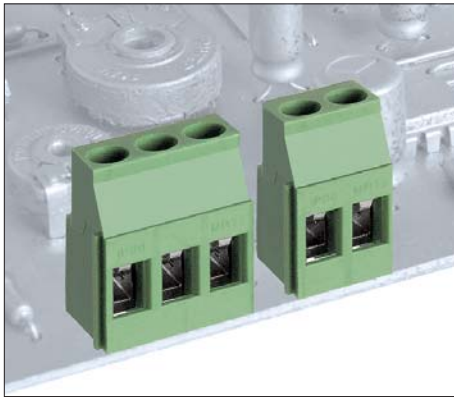


5	5,08
320	
24	

		
0,2 ÷ 4 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
6		
0,5	5	
110		
PA - UL 94 V0		
M3		
	0,6 x 3,5	

V	A	mm²/AWG
450	24	0,5 ÷ 2,5
450	24	0,5 ÷ 2,5
300	16	24 ÷ 12

min 2 - max ...		
VE		
73		

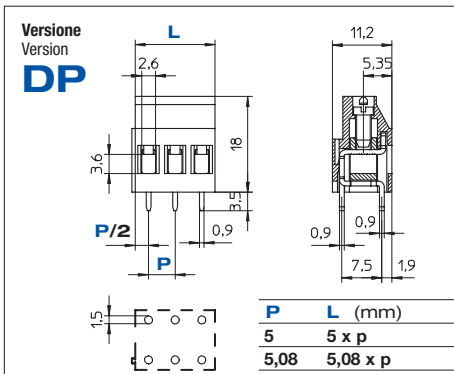

MRT5

MRT5..SQ

MRT5..DP

MRT5

MRT5..SQ

Modulo componibile
Elements modulaires

Interlocking modules
Zusammensteckbare Blöcke

Modulo componibile
Elements modulaires

Interlocking modules
Zusammensteckbare Blöcke

Modulo componibile
Elements modulaires

Interlocking modules
Zusammensteckbare Blöcke

Poli
Pôles

Poles
Polzahl

2/3

Poli
Pôles



Poles
Polzahl

2/3

Poli
Pôles

Poles
Polzahl

1/2

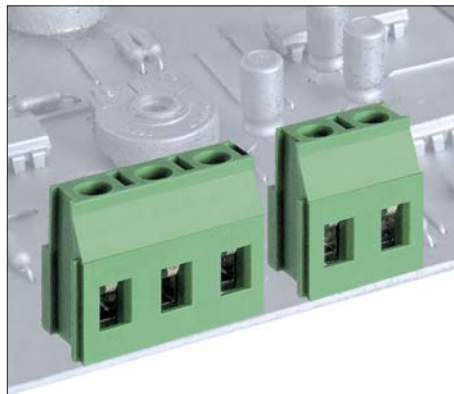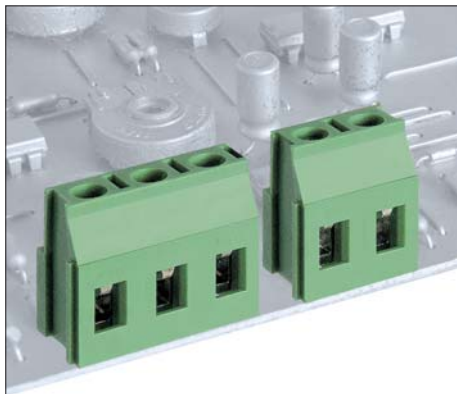

7,5

7,62

500

24



		
0,2 ÷ 4 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
6		
0,5	5	
110		
PA - UL 94 V0		
M3		
	0,6 x 3,5	

V	A	mm²/AWG
750	24	0,5 ÷ 2,5
750	24	0,5 ÷ 2,5
300	16	24 ÷ 12

min 2 - max ...

VE

73

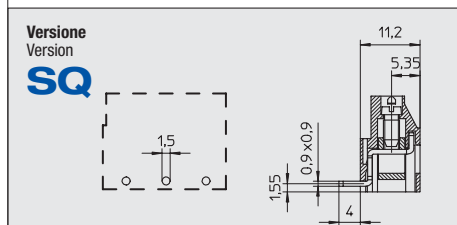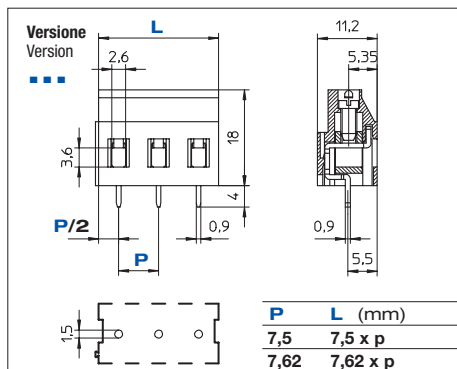

7,5

7,62

500

24


		
0,2 ÷ 4 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
6		
0,5	5	
110		
PA - UL 94 V0		
M3		
	0,6 x 3,5	

V	A	mm²/AWG
750	24	0,5 ÷ 2,5
750	24	0,5 ÷ 2,5
300	16	24 ÷ 12

min 2 - max ...

VE

73

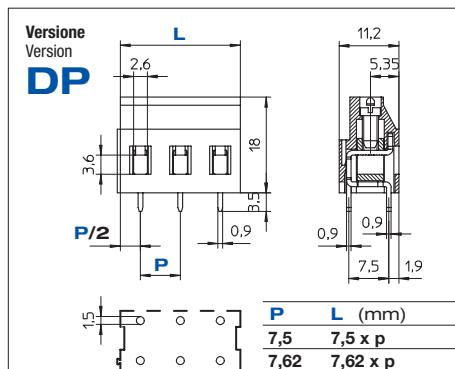

10

10,16

630

24



		
0,2 ÷ 4 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
6		
0,5	5	
110		
PA - UL 94 V0		
M3		
	0,6 x 3,5	

V	A	mm²/AWG
750	24	0,5 ÷ 2,5
750	24	0,5 ÷ 2,5
300	16	24 ÷ 12

min 2 - max ...

VE

73

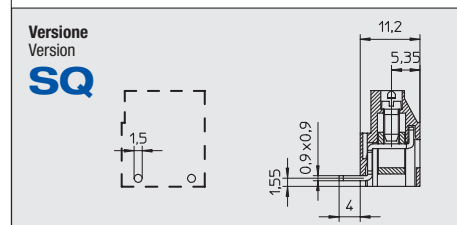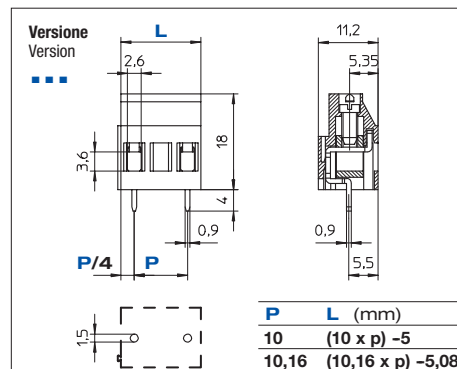

Morsetti per C.S. carrello

A1 Terminal blocks for P.C.B. rising clamp

Blocs de jonction C.I.
étrier remontant

Printklemmen
Liftprinzip

Passo Pas	Pitch Rastermaß	mm
Tensione nominale Tension nominale	Rated Voltage Bemessungsspannung	V
Corrente nominale Intensité nominale	Rated Current Bemessungsstrom	A

Tipo cavi Type du conducteur	Types of cables Leitungstypen	
Sezione nominale Section nominale	Nominal cross section Nennquerschnitt	mm² AWG
Lunghezza spelatura Longueur de dénudage	Stripping length Abisolierlänge	mm
Coppia di torsione Couple de serrage	Torque Drehmoment	Nm Lb-in
Temperatura Température	Temperature Temperatur	°C
Corpo isolante Corps isolant	Housing Isolierkörper	
Vite imperdibile Vis imperdable	Captive screw Unverlierbare Schraube	
		mm

	IMQ	EN60998
	VDE	EN60998
	UL	UL1059
	cUL	UL1059 + C22.2 n°158

Poli Pôles	Poles Polzahl	X →
Colore standard Coloris standard	Standard colour Standardfarbe	Y →
Altri dati Autres données	Other information Weitere Informationen	pag. Seite

Ordinazione Référence de commande	How to order Bestellschlüssel
MRT5 P5 / X DP Y ...	
Tipo Type	Passo Pitch
Poli Pôles	Versione Version
Colori Couleurs	Numerazione Marquage
Bedruckung	

Altri colori a richiesta. Other colours on demand.
Autres couleurs sur demande. Andere Farben bei Bedarf.

VE GR NE AR BL RO


MRT5..DP

Modulo componibile
Elements modulaires
Interlocking modules
Zusammensteckbare Blöcke

Poli
Pôles

Poles
Polzahl

1/2

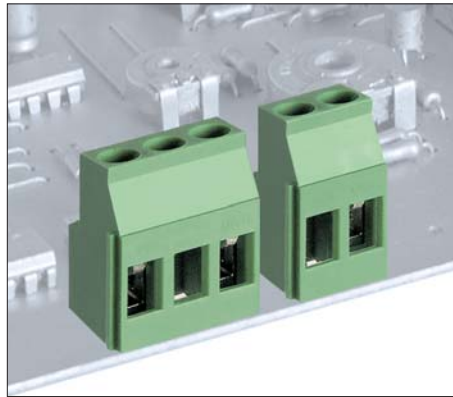


10	10,16
630	
24	

0,2 ÷ 4 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
6		
0,5		5
110		
PA - UL 94 V0		
M3		
0,6 x 3,5		

V	A	mm²/AWG
750	24	0,5 ÷ 2,5
750	24	0,5 ÷ 2,5
300	16	24 ÷ 12

min 2 - max ...
VE
73

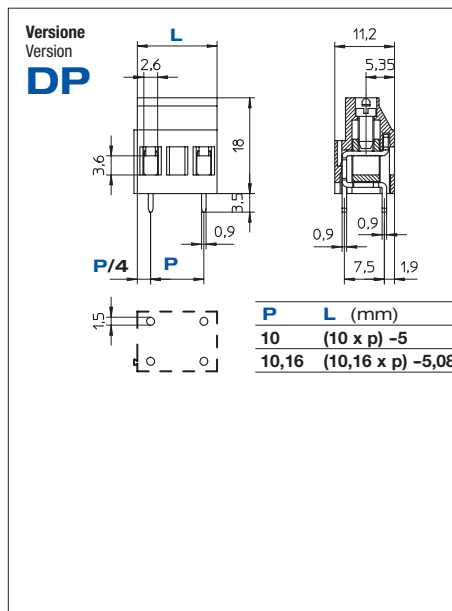

MRT15


Blocco unico
Monobloc

Single block
Einzelblock

Poli
Pôles

Poles
Polzahl

2/24

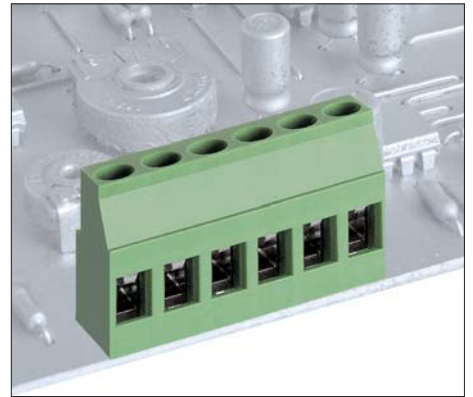

5	5,08
320	
24	

0,2 ÷ 4 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
6		
0,5		5
110		
PA - UL 94 V0		
M3		
0,6 x 3,5		

V	A	mm²/AWG
450	24	0,5 ÷ 2,5
450	24	0,5 ÷ 2,5
300	16	30 ÷ 12

min 2 - max 24
VE
73/74

