


## Thin Film Mini-MELF Resistors



### FEATURES

- Advanced thin film technology
- AEC-Q200 qualified
- Low TCR and tight tolerances
- Excellent stability in different environmental conditions
- Pure tin termination on nickel barrier, plated on press fit steel caps
- Compliant to RoHS Directive 2002/95/EC

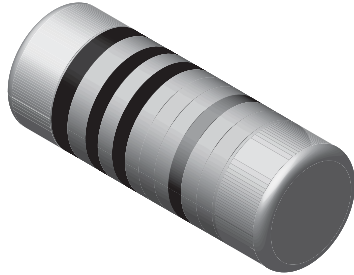

**RoHS**  
COMPLIANT

**GREEN**  
(5-2008)\*\*

### STANDARD ELECTRICAL SPECIFICATIONS

MODEL	POWER RATING $P_{70}$ W	LIMITING ELEMENT VOLTAGE DC or AC <sub>RMS</sub> V	TEMPERATURE COEFFICIENT ppm/K	TOLERANCE %	RESISTANCE RANGE $\Omega$	E-SERIES
SMM0204	0.25	200	$\pm 15$	$\pm 0.1$ $\pm 0.25$ $\pm 0.5$	43R to 221K 22R to 221K 10R to 221K	24; 96; 196
SMM0204	0.25	200	$\pm 25$	$\pm 0.1$ $\pm 0.25$ $\pm 0.5$	43R to 511K 22R to 511K 10R to 1M0	24; 96; 196
SMM0204	0.25	200	$\pm 50$	$\pm 0.5$ $\pm 1$	10R to 1M0 R82 to 10M	24; 96; 196 24; 96
SMM0204	0.25	200	$\pm 100$	$\pm 5$	R22 to 10M	24
Zero-Ohm-Resistor: OMM0204 $R_{max.} = 10\text{ m}\Omega$ $I_{max.} = 3\text{ A}$						

#### Notes

- SMM0204 EN803 E0 and OMM0204 EN803 E0 respectively are available versions with IECQ-CECC approval to EN 140401-803, version A, with nominal failure rate level E0.
- The power dissipation on the resistor generates a temperature rise against the local ambient, depending on the heat flow support of the printed-circuit board (thermal resistance). The rated dissipation applies only if the permitted film temperature of 155 °C is not exceeded.

### TECHNICAL SPECIFICATIONS


PARAMETER	UNIT	SMM0204
Power rating $P_{70}$	W	0.25
Limiting element voltage, DC or AC <sub>RMS</sub>	V	200
Insulation voltage (1 min), DC or AC <sub>PEAK</sub>	V	300
Insulation resistance	$\Omega$	$\geq 10^{10}$
Category temperature range	°C	- 55 to + 125 (+ 155)
Failure rate: FIT <sub>observed</sub>		$\leq 0.1 \times 10^{-9}/\text{h}$

#### Notes

- The upper temperature limit of 125 °C reflects the prescriptions of the detail specification EN 140401-803. However, the products may be operated up 155 °C, if the tradeoff through decreased drift stability is acceptable to the specific application.
- The power dissipation on the resistor generates a temperature rise against the local ambient, depending on the heat flow support of the printed-circuit board (thermal resistance). The rated dissipation applies only if the permitted film temperature of 125 °C or 155 °C respectively is not exceeded.
- The specification of this product is based on a test board according to EN 140400, providing a thermal resistance of approximately 220 K/W.
- These resistors do not feature a limited lifetime when operated within the permissible limits. However, resistance value drift increasing over operating time may result in exceeding a limit acceptable to the specific application, thereby establishing a functional lifetime.
- The IECQ-CECC approved product versions SMM0204 EN803 E0 and OMM0204 EN803 E0 respectively feature a quality factor  $\pi_Q = 3$  for the purpose of system MTBF calculations, compared with  $\pi_Q = 10$  for the standard versions.

\*\* Please see document "Vishay Material Category Policy": [www.vishay.com/doc?999902](http://www.vishay.com/doc?999902)

**DIMENSIONS**

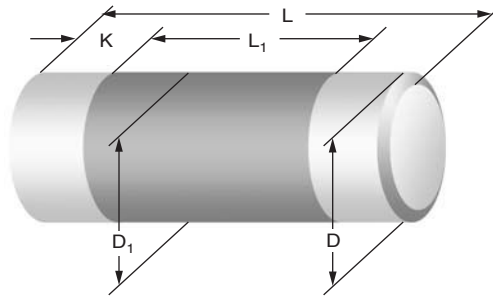


DIMENSIONS AND MASS						
TYPE	L (mm)	D <sub>max.</sub> (mm)	L <sub>1</sub> min. (mm)	D <sub>1</sub> (mm)	K (mm)	MASS (mg)
SMM0204 OMM0204	3.6 + 0/- 0.15	1.4	1.75	D + 0/- 0.15	0.85 + 0/- 0.35	18

**Notes**

- Color code marking is applied according to IEC 60062 in four bands for 5 % tolerance, or in five bands. Each color band appears as a single solid line, voids are permissible if at least 2/3 of the band is visible from each radial angle of view. The last color band for tolerance is approximately 50 % wider than the other bands.
- The color of the body coating is light green for jumpers and for a temperature coefficient of ± 50 ppm/K or of ± 100 ppm/K, pink for ± 25 ppm/K, or violet for ± 15 ppm/K.
- Zero ohm jumper are marked with one centered black band.

**PATTERN STYLES FOR MELF RESISTORS**

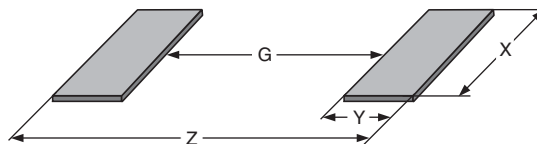

RECOMMENDED SOLDER PAD DIMENSIONS								
TYPE	WAVE SOLDERING				REFLOW SOLDERING			
	G (mm)	Y (mm)	X (mm)	Z (mm)	G (mm)	Y (mm)	X (mm)	Z (mm)
SMM0204 OMM0204	1.5	1.5	1.8	4.5	1.6	1.25	1.7	4.1

**Note**

- The given solder pad dimensions reflect the considerations for board design and assembly as outlined e.g. in standards IEC 61188-5-x, or in publication IPC-7351. They do not guarantee any supposed thermal properties, however, they will be found adequate for most general applications.

PART NUMBER AND PRODUCT DESCRIPTION																	
Part Number: SMM02040C5620FB000																	
Part Number: OMM02040000000B000																	
S	M	M	0	2	0	4	0	C	5	6	2	0	F	B	0	0	0
O	M	M	0	2	0	4	0	0	0	0	0	0	0	B	0	0	0
MODEL		VERSION				TCR			RESISTANCE				TOLERANCE		PACKAGING		
SMM0204 OMM0204		0 = Neutral V = EN 140401-803, version A, nominal failure rate level E0				E = ± 15 ppm/K D = ± 25 ppm/K C = ± 50 ppm/K B = ± 100 ppm/K 0 = Jumper			3 digit value 1 digit multiplier 0000 = Jumper MULTIPLIER 7 = *10 <sup>-3</sup> 2 = *10 <sup>2</sup> 8 = *10 <sup>-2</sup> 3 = *10 <sup>3</sup> 9 = *10 <sup>-1</sup> 4 = *10 <sup>4</sup> 0 = *10 <sup>0</sup> 5 = *10 <sup>5</sup> 1 = *10 <sup>1</sup>				B = ± 0.1 % C = ± 0.25 % D = ± 0.5 % F = ± 1 % J = ± 5 % 0 = Jumper		B1 B3 B0 M3		
Product Description: SMM0204 50 562R 1 % B0																	
Product Description: OMM0204 0R0 B0																	
SMM0204		50				562R			1 %				B0		-		
OMM0204		-				0R0			-				B0		-		
MODEL		TCR				RESISTANCE			TOLERANCE				PACKAGING		VERSION		
SMM0204 OMM0204		± 15 ppm/K ± 25 ppm/K ± 50 ppm/K ± 100 ppm/K				100R = 100 Ω 2M21 = 2.21 MΩ 0R0 = Jumper			± 0.1 % ± 0.25 % ± 0.5 % ± 1 % ± 5 %				B1 B3 B0 M3				

Note


- Products can be ordered using either the PART NUMBER or the PRODUCT DESCRIPTION.

PACKAGING						
TYPE	CODE	QUANTITY	CARRIER TAPE	WIDTH	PITCH	REEL DIAMETER
SMM0204 OMM0204	B1 <sup>(1)</sup>	1000 <sup>(1)</sup>	Blister tape acc. IEC 60286-3 Type II	8 mm	4 mm	180 mm/7"
	B3	3000				330 mm/13"
	B0	10 000				
	M3	3000	Bulk case acc. IEC 60286-6	-	-	-
SMM0204 EN803 E0 OMM0204 EN803 E0	B1	1000	Blister tape acc. IEC 60286-3 Type II	8 mm	4 mm	180 mm/7"
	B3	3000				330 mm/13"
	B0	10 000				


Note

- <sup>(1)</sup> Package of 1000 pieces, code B1, is available only for products with TCR ± 25 ppm/K or ± 15 ppm/K, and with tolerance ± 0.25 % or ± 0.1 %.


**FUNCTIONAL PERFORMANCE**

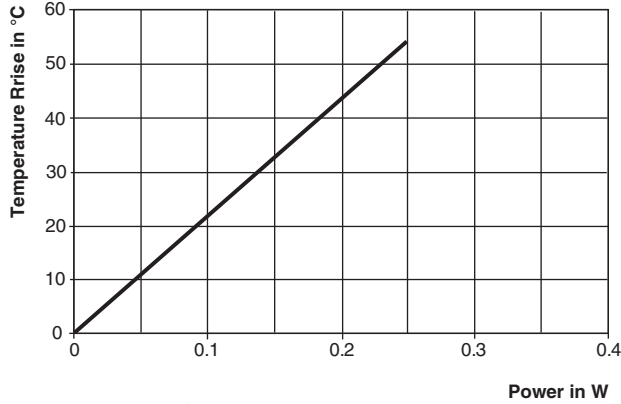


Temperature Rise

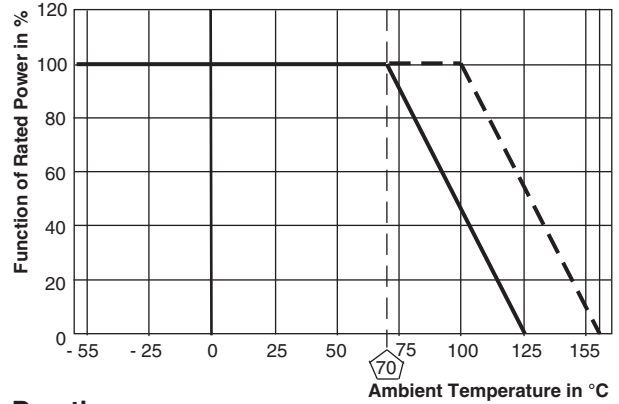


Derating

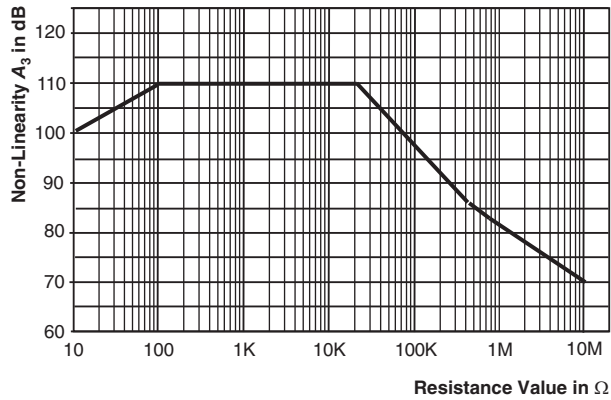


Non-linearity

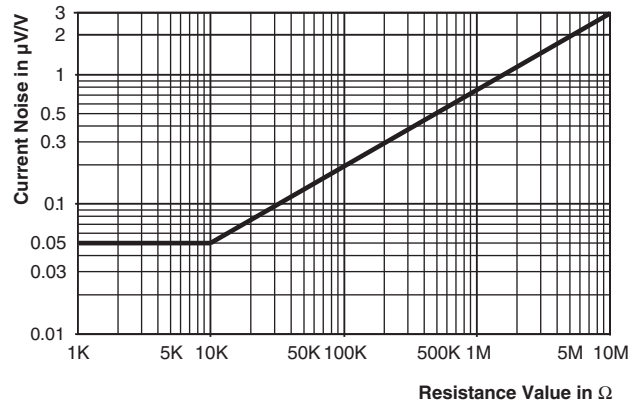

Current Noise

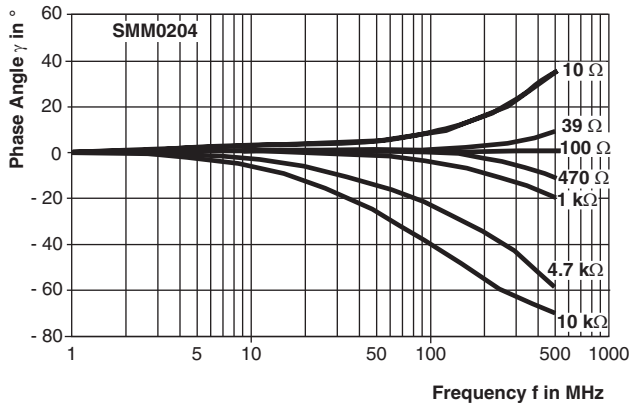


HF - Performance

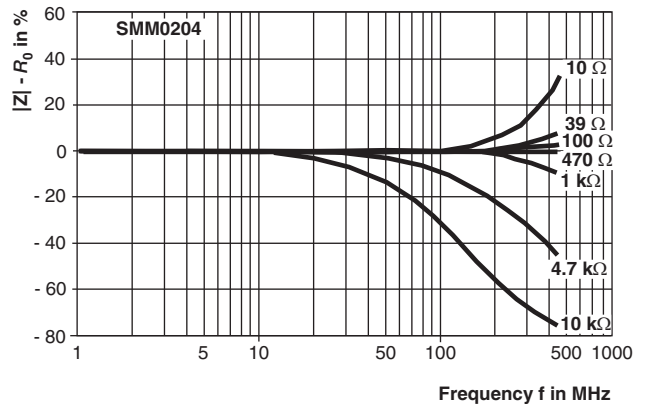


HF - Performance


**FUNCTIONAL PERFORMANCE**

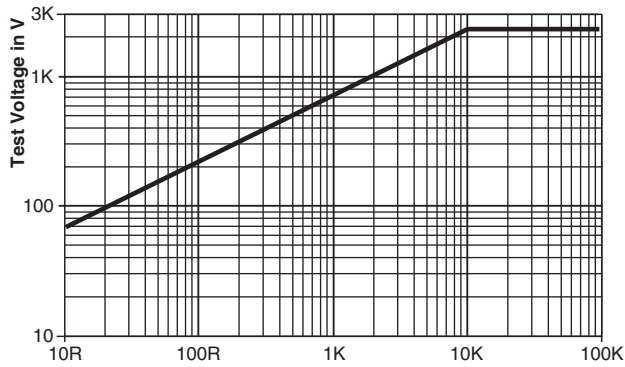


Single pulse high voltage overload capability  
1.2/50 acc. EN 60115-1, 4.27

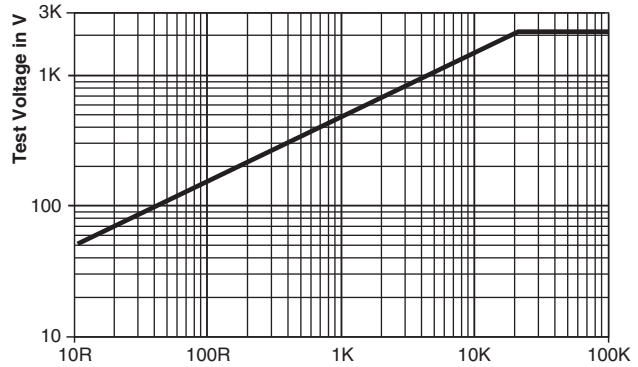


Single pulse high voltage overload capability  
10/700 acc. EN 60115-1, 4.27

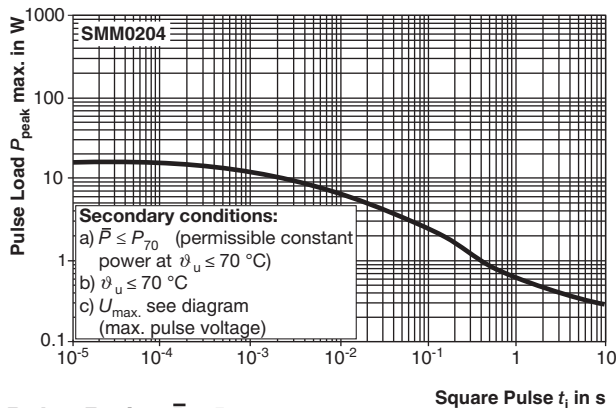

Pulse Rating  $\bar{P} \leq P_{70}$

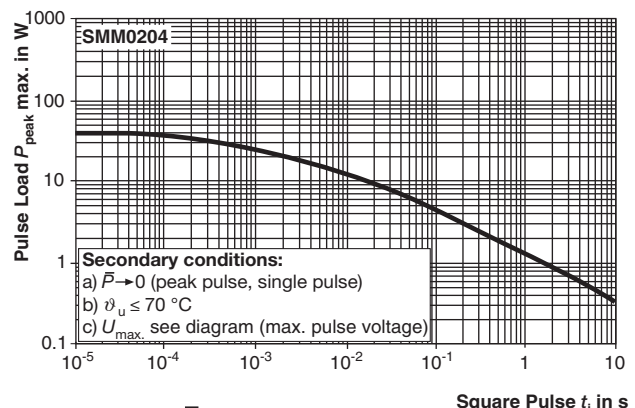

Pulse Rating  $\bar{P} \rightarrow 0$

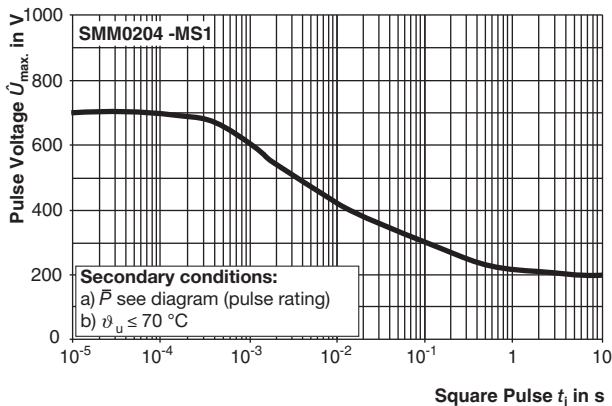

Maximum Pulse Voltage



TEST PROCEDURES AND REQUIREMENTS					
TEST	CONDITIONS OF TEST	REQUIREMENTS PERMISSIBLE CHANGE ( $\Delta R$ )			
		STABILITY CLASS 0.25	STABILITY CLASS 0.5	STABILITY CLASS 1	STABILITY CLASS 2
		10 $\Omega$ to 332 k $\Omega$	1 $\Omega$ to 10 $\Omega$	< 1 $\Omega$	> 332 k $\Omega$
Endurance test at 70 °C IEC 60115-1, 4.25.1	$U = \sqrt{P_{70} \times R} \leq U_{max.};$ 1.5 h "on", 0.5 h "off"  at 70 °C, 1000 h  at 70 °C, 8000 h	$\pm (0.25 \% R + 0.05 \Omega)$  $\pm (0.5 \% R + 0.05 \Omega)$			$\pm (0.5 \% R + 0.05 \Omega)$  $\pm (1.0 \% R + 0.05 \Omega)$
Endurance at UCT IEC 60115-1, 4.25.3	at 125 °C, 1000 h	$\pm (0.25 \% R + 0.05 \Omega)$			$\pm (0.5 \% R + 0.05 \Omega)$
Damp heat steady state 40 °C/93 % RH IEC 60115-1, 4.24 and IEC 60068-2-78	56 days; $U = 0.1 \times \sqrt{P_{70} \times R};$ $U_{max.} = 20 \text{ V}$	$\pm (0.25 \% R + 0.05 \Omega)$	$\pm (0.5 \% R + 0.05 \Omega)$		
Damp heat steady state accelerated 85 °C/85 % RH	1000 h; $U = 0.3 \times \sqrt{P_{70} \times R};$ $U_{max.} = 40 \text{ V}$	$\pm 1.0 \% R + 0.05 \Omega$ <sup>(1)</sup>			
Rapid change of temperature; 1000 cycles IEC 60115-1, 4.19 and IEC 60068-2-14	30 min at LCT; 30 min at UCT; LCT = - 55 °C; UCT = 125 °C	$\pm (0.25 \% R + 0.05 \Omega)$			
Overload test IEC 60115-1, 4.13	$U = 2.5 \times \sqrt{P_{70} \times R} \leq 2 \times U_{max.};$ 2 s	$\pm (0.05 \% R + 0.01 \Omega)$			$\pm (0.1 \% R + 0.05 \Omega)$
Electrostatic discharge (HBM) IEC 60340-3-1	3 positive + 3 negative discharges 2 kV	$\pm (0.5 \% R + 0.05 \Omega)$			
Resistance to soldering heat IEC 60115-1, 4.18.2 and IEC 60068-2-58	Solder bath method (260 $\pm$ 5) °C; 10 s	$\pm (0.05 \% R + 0.01 \Omega)$	$\pm (0.1 \% R + 0.05 \Omega)$		

**Note**

<sup>(1)</sup> For resistance > 2M21:  $\pm (2.0 \% R + 0.05 \Omega)$ .

APPLICABLE SPECIFICATIONS	
• EN 60115-1	Generic specification
• EN 140400	Sectional specification
• EN 140401-803	Detail specification
• IEC 60068-2-x	Variety of environmental test procedures
• IEC 60286-3	Packaging of SMD components



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.