

Axial Cemented, Fusible, Wirewound Resistors



FEATURES

- Can operate as both a normal resistor and as a fuse
- Fuses when overloaded by more than 100 times the rated power
- Ceramic core
- Non flammable cement coating
- Mainly designed to customer requirements
- Pure tin plating provides compatibility with lead (Pb)-free and lead containing soldering processes
- Compatible with "Restriction of the use of Hazardous Substances" (RoHS) directive 2002/95/EC (issue 2004)



STANDARD ELECTRICAL SPECIFICATIONS									
GLOBAL MODEL	HISTORICAL MODEL	POWER RATING $P_{40\text{ }^\circ\text{C}}$ W (max.)	STANDARD TOL. (max.) $\pm\%$	NOMINAL RES. ⁽¹⁾ (typical) Ω	TEMP. COEF. (typical) ppm/ $^\circ\text{C}$	MAX. PEAK ENERGY ⁽¹⁾ Ws (max.)	MAX. PEAK POWER ⁽²⁾ W (max.)	PERMISSIBLE $I^2 \times t$ VALUE ⁽³⁾ AT 40 $^\circ\text{C}$ A ² s (min.)	FUSING $I^2 \times t$ VALUE ⁽³⁾ AT 40 $^\circ\text{C}$ A ² s (min.)
Z3020414	Z302 BV 20327	3	10 5	15	100 to 180	1.07	1875	0.07	0.27

Notes

- ⁽¹⁾ Ambient temperature = 23 $^\circ\text{C}$
- ⁽²⁾ Ambient temperature = 40 $^\circ\text{C}$
- ⁽³⁾ Ambient temperature = 100 $^\circ\text{C}$

CHARACTERISTICS OF FUSIBLE RESISTORS

Fusible resistors are capable of acting as both a regular resistor and as a fuse when abnormal current comes in. Since the two functions are performed by only one component the cost is lower.

The Z302 BV 20327 fuses when overloaded at more than 100 times the rated power. In line-powered devices, these fusible resistors can be used to act as a fuse when malfunction occurs and line voltage drops across the resistor.

To prevent flames or explosion when fusing, the device has an inflammable construction with high dielectric strength. After fusing the resistance value will be more than 100 k Ω to realize sufficient circuit break. The components are mainly designed specifically to customer requirements.

APPLICATIONS FOR FUSIBLE RESISTORS

- Power supplies
- Energy saving lamps
- Battery charges

GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: Z302041441509JD2FON (preferred part numbering format)


Z	3	2	0	4	1	4	4	1	5	0	9	J	D	2	F	O	N
MODEL	TCR/MATERIAL	VALUE	TOLERANCE CODE	PACKAGING	SPECIAL												
Z302	4 = SWI (special winding)	3 digit value 1 digit multiplier 9 = $\times 10^{-1}$	J = $\pm 5.0\%$ K = $\pm 10.0\%$	(See Packaging table)	The 5 digit BV number will be encoded using a 36 character code. This code contains numbers 0...9 and letters A...Z (36 characters total and allows to encode at least 46.655 five digit BV numbers. 000 = Standard												

Historical Part Number Example: Z302 SWI 15R 10% R2 G53 (will continue to be accepted)

Z302	SWI	15R	10%	R2 G53
HISTORICAL MODEL	TCR/MATERIAL	VALUE	TOLERANCE CODE	PACKAGING


PACKAGING TABLE			
SAP	DRALORIC LEGACY	PACKAGING 2 digits	
D2	R2 G53	Reel pack tape 53 mm, 2000 pieces	Z302 BV 20327

DIMENSIONS

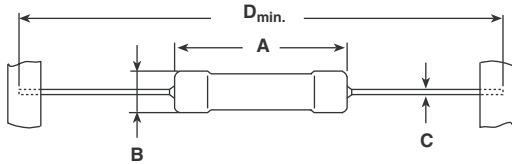


MODEL	DIMENSIONS in millimeters [inches]				WEIGHT (g)
	A	B	C	D _{min.}	
Z302 BV 20327	13 [0.512]	4.8 [0.189]	0.8 [0.31]	53 ± 1 2.087 ± 0.039	0.8 typical


PERFORMANCE	
TEST	TEST RESULTS
Load Life, 12 000 h	± 3 % ΔR
Vibration	± 1 % ΔR
Shock	± 1 % ΔR
Resistance to Soldering Heat	± 1 % ΔR

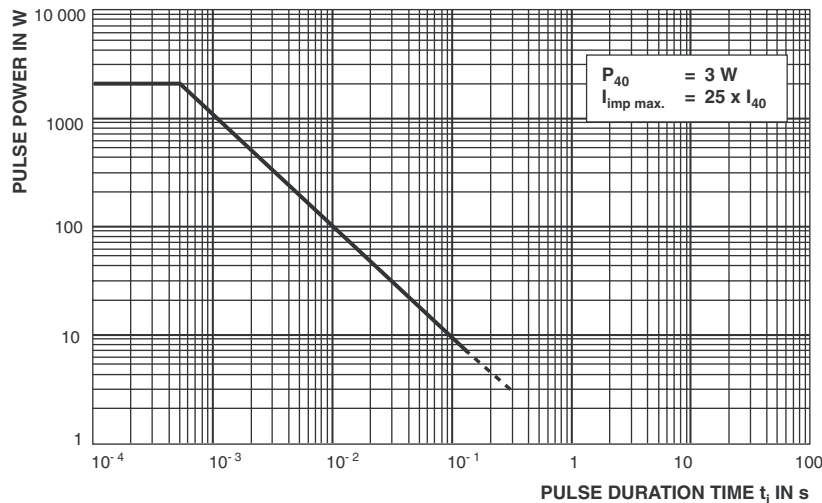

Pulse performance for single square pulses at 40 °C

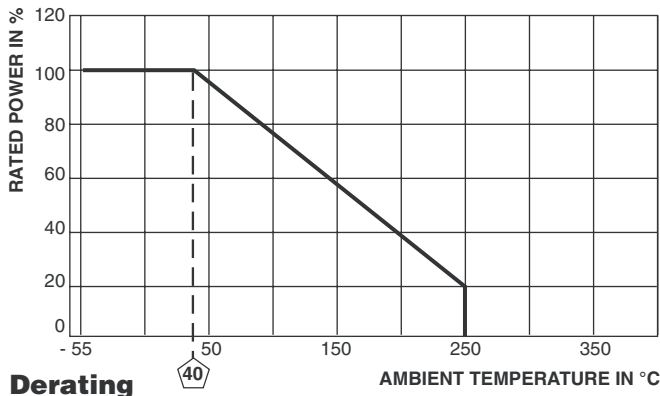

Derating

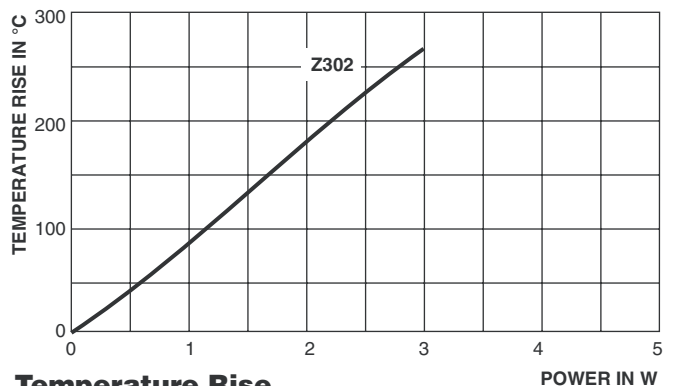

Temperature Rise



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.