


	<b>DIN 7981 C</b>	<b>~ISO 7049</b>			<b>450 HV</b>
--	-------------------	------------------	--	--	---------------



Standard withdrawn

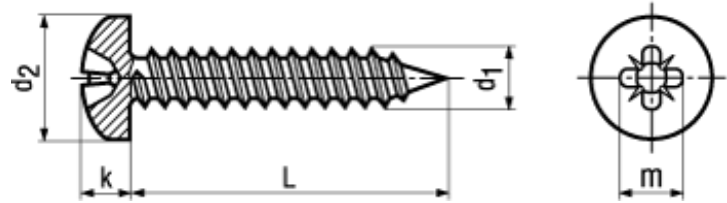

**BN 30901**

**Pozi pan head tapping screws**

form Z, with cone end type C

Steel case-hardened 450 HV

zinc plated black

- ~UNI 6954 AB
- ~ČSN 021235



**ISO 4042**

Quenched and tempered fasteners  $\geq 360$  HV and tempered case-hardened fasteners with electroplated coatings: Susceptible to hydrogen embrittlement! Further notice to residual risks can be found in the introduction section.

Article#	$d_1$	$d_2$ max.	$k$ max.	$m$ ~	L
5000785	ST 2,9	5,6	2,2	2,9	6,5
5000793					9,5
5000777					13
5000823	ST 3,5	6,9	2,6	3,9	6,5
5000831					8
5000858					9,5
5000807					13
5000815					16
3316382					25
5000874	ST 4,2	8,2	3,05	4,3	8
5000882					9,5
5000866					13