




952.190.

M.49


UNIDIRECTIONAL PAGING MICROPHONE

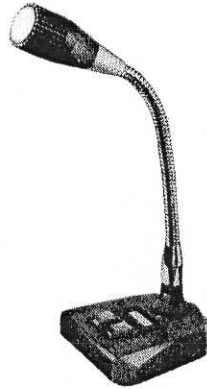

- Excellent quality flexible gooseneck shaft.
- Unidirectional Microphone for Paging & Conference Halls.
- Soft touch Push Switches-For Momentary use or for locking.

SPECIFICATIONS

Type	: Dynamic Transducer
Impedance	: 500 Ohms
Sensitivity	: 2mV/Pa (-73dBV)
Freq. Response	: 100 - 10,000 Hz
Polar Pattern	: cardioid
Swivel	: 360 ° with gooseneck for adjustable mounting
Switch	: Two soft-touch "Press to Talk" Push switches. One switch for MOMENTARY use and second for use in LOCKING mode.
Cable	: 6 Mtrs., 4 Core (2 Core screened with spare pair)
Weight	: 1 Kg.

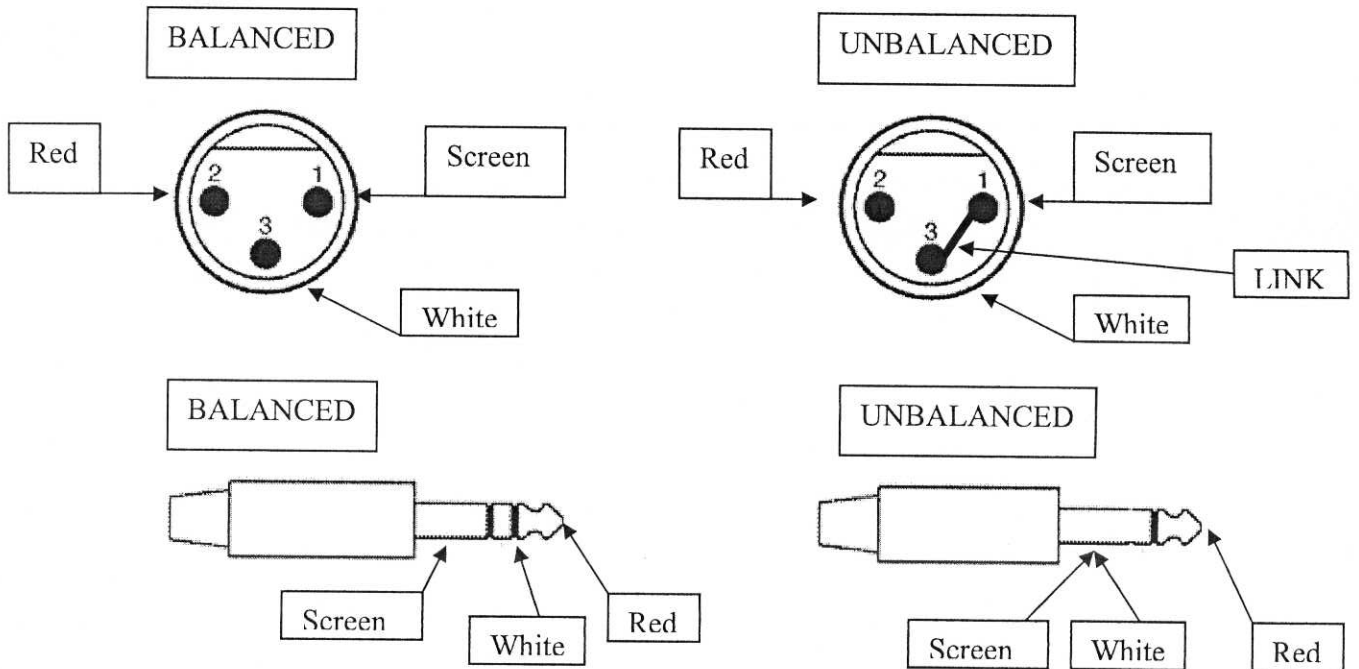

Note: The Black and Blue wires are for amplifiers which need a switched pair for priority override.