


ORDERING INFORMATION

V K	0 6	H	0 3	D	0	Z					
SERIES PREFIX	CODE	RATING CURRENT	CODE	OPERATING FORCE	CODE	ACTUATOR TYPE	CODE	TERMINAL TYPE	CODE	CIRCUIT ARRANGEMENT	ROHS CODE
	P1	0.1A 125/250VAC	B		00		A	SOLDER TERMINAL(A)	0	S.P.D.T	
	03	3A 125/250VAC	D		01		C	250 SERIES (C)	1	S.P.S.T. NO	
	06	6A 125/250VAC	N		02		D	187 SERIES (D)	2	S.P.S.T. NC	
	10	10A 125/250VAC	L		03						
	15	15A 125/250VAC	S		04						
			H		05						
			Q		06						
			A								
			C								
			M								
			K								
			R								
			G								
			P								


TERMINAL TYPES

PCB TERMINAL


Solder terminal A TYPE




Quick connect terminal 250 C TYPE



Quick connect terminal 187 D TYPE



MOUNTING HOLES







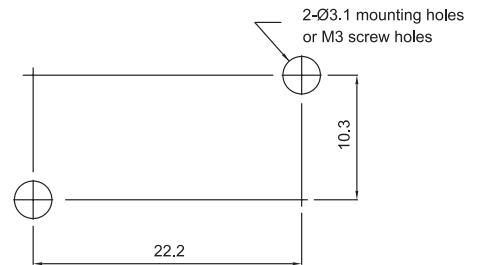


CERTIFICATE INFORMATION

UL, CSA

0.1A 125/250VAC, 3A 125/250VAC, 6A 125/250 VAC-6000 cycles
10A 125/250 VAC, 15A 125/250 VAC-6000 cycles(Temp:all rating 55°C)

ORDERING CHARACTERISTICS

SWITCH TYPE	PART SUFFIX	OF - Max. (gf)								OP (mm)	PT Max. (mm)	OT Min. (mm)	MD Max. (mm)
		B	D	N	L	S	H	Q					
		A	C	M	K	R	G	P					
VK-□□□-00□□-Z		18	45	75	110	170	230	330	14.7 ±0.5	1.72	0.80	0.25	
		—	—	—	—	—	—	—	—	—	—	—	
VK-□□□-01□□-Z		18	45	75	110	170	230	330	15.3 ±0.5	1.57	0.60	0.41	
		8	27	43	50	85	120	175	15.3 ±1.1	2.85	1.55	0.50	
VK-□□□-02□□-Z		8	22	37	50	86	125	180	15.3 ±1.5	3.18	1.60	0.76	
		5	16	22	30	51	65	90	15.3 ±2.3	5.60	3.10	1.02	
VK-□□□-03□□-Z		6	13	25	30	49	70	120	15.3 ±2.5	7.60	3.00	1.40	
		—	8	15	20	30	35	50	15.3 ±4.3	10.0	5.00	1.70	
VK-□□□-04□□-Z		10	28	43	65	110	140	208	18.7 ±1.5	3.18	1.40	0.76	
		7	16	24	35	56	70	100	18.7 ±2.1	5.60	2.55	1.02	
VK-□□□-05□□-Z		20	55	80	110	170	230	330	20.7 ±0.8	1.72	0.60	0.25	
		8	35	55	70	100	120	175	20.7 ±1.1	2.50	1.40	0.40	
VK-□□□-06□□-Z		8	30	50	65	100	125	180	20.7 ±1.5	3.18	1.60	0.76	
		5	20	30	40	51	65	90	20.7 ±2.2	5.08	2.80	1.02	