

M12 Circular Panel Mount, Back Mount

Features


- For enclosure, panel and PCB applications
- UL94V-0 flame retardant
- RoHS compliant

Specification

Protection Rating	IP67
Wire Connection Mode	Soldering
Operating Temperature Min.	-40 °C
Operating Temperature Max.	80 °C
Connector Size	M12
Gender	Plug




Drawing

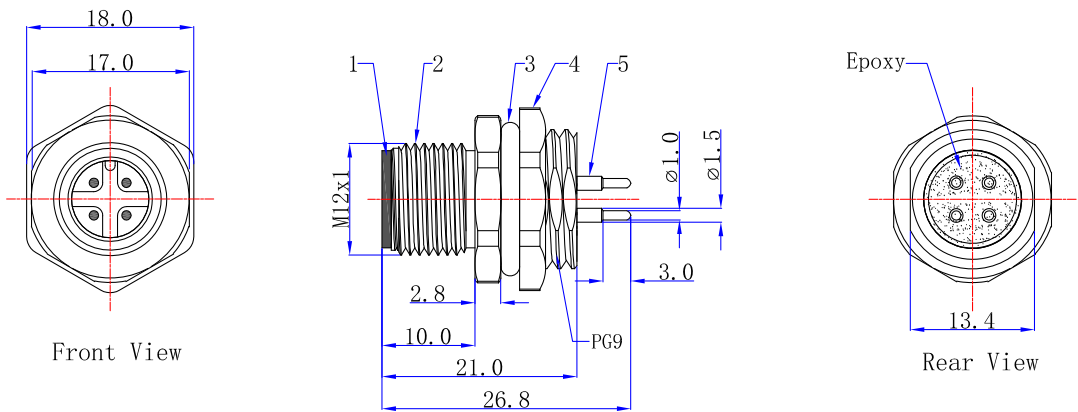

Article Nr.	Number of Pins	Rated Voltage	Rated Current	Withstanding Voltage
M12-3-SOLDER	3	250V	4 A	1.5 kVAC / 1 min
M12-4-SOLDER	4	250 V	4 A	1.5 kVAC / 1 min
M12-5-SOLDER	5	60 V	4 A	1.12kVAC / 1 min
M12-8-SOLDER	8	30 V	2 A	500 VAC / 1 min

Pin Out

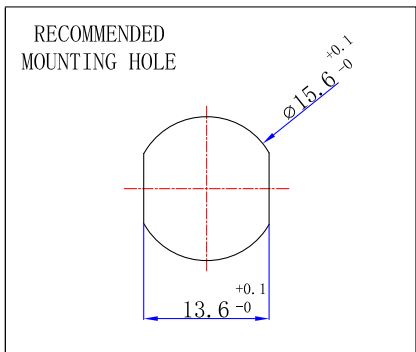

Pin Assignment Front View				P. C. B			
3Pin	4Pin	5Pin	8Pin	3Pin	4Pin	5Pin	8Pin