


Technical Data Sheet

0.8mm Height Flat Top LED

17-215SURC/S530-XX/TRXX

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.



Descriptions

- The 17-215 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.
- Indoor signboard use.


Device Selection Guide


C		
Material	Emitted Color	Lens Color
AlGaInP	Hyper Red	Water Clear


Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 1 of 10




Package Outline Dimensions








For reflow soldering (propose)





Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 2 of 10 Device No.: SZDSE-175-004 Prepared date: 07-27-2005 Prepared by: Aihua hong



Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	IF	25	mA
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\! \mathbb{C}$
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!\mathbb{C}$
Soldering Temperature	Tsol	260 (for 5 seconds)	°C
Electrostatic Discharge	ESD	2000	V
Power Dissipation	Pd	60	mW
Peak Forward Current (Duty 1/10 @1KHz)	IFP	160	mA

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 3 of 10 Device No.: SZDSE-175-004 Prepared date: 07-27-2005 Prepared by: Aihua hong



EVERLIGHT ELECTRONICS CO.,LTD.

17-215SURC/S530-XX/TRXX

Electro-Optical Characteristics (Ta=25 $^{\circ}$ C)


Parameter	Symbol	*Chip rank	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	Iv	A2		2		mcd		
		A3		3			IF=2mA	
		A4		4				
		A5		5				
		A6		6				
		A2	13	32				
		A3	31	46				
		A4	42	63				
		A5	51	78				
		A6	61	94				
Peak Wavelength	λр			632		nm	IF=20mA	
Dominant Wavelength	λd			624		nm		
Spectrum Radiation Bandwidth	Δλ			20		nm		
Viewing Angle	2 \theta 1/2			130		deg		
Forward Voltage	VF			2.0	2.4	V		
Reverse Current	Ir				10	μ A	V _R =5V	


*17-215SURC/S530-XX/TRXX





Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 4 of 10

Typical Electro-Optical Characteristics Curves












Device No.: SZDSE-175-004







Prepared by: Aihua hong

Everlight Electronics Co., Ltd. Rev.2 Page: 5 of 10 http://www.everlight.com Prepared date: 07-27-2005

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

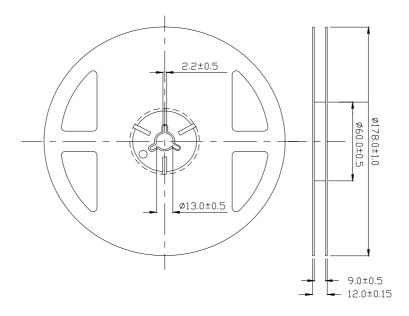


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 6 of 10


Page: 7 of 10

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

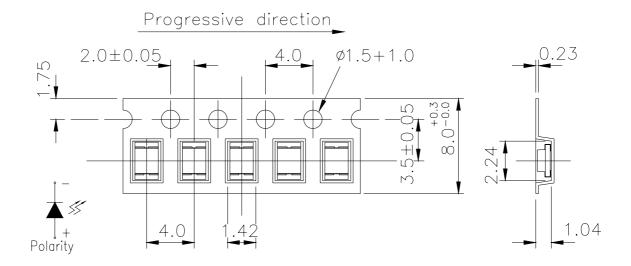

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

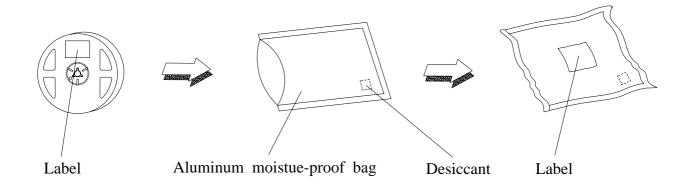

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min \int 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°℃	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85% RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 8 of 10

Device No.: SZDSE-175-004 Prepared date: 07-27-2005 Prepared by: Aihua hong



Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).


2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30°C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : $60\pm5^{\circ}$ C for 24 hours.

3. Soldering Condition

3.1 Pb-free solder temperature profile

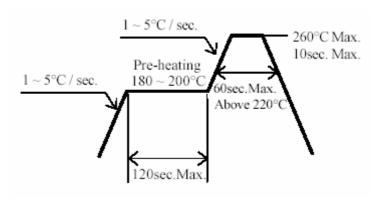

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 9 of 10

Device No.: SZDSE-175-004 Prepared date: 07-27-2005 Prepared by: Aihua hong




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 280° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

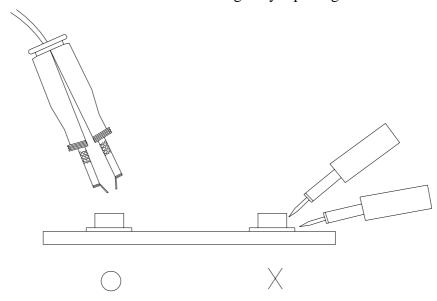

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 10 of 10