
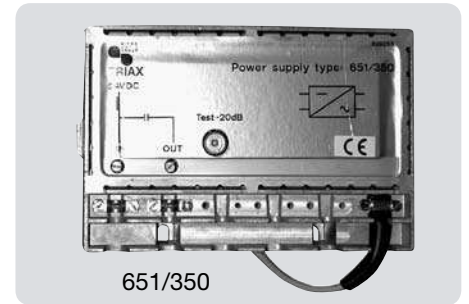
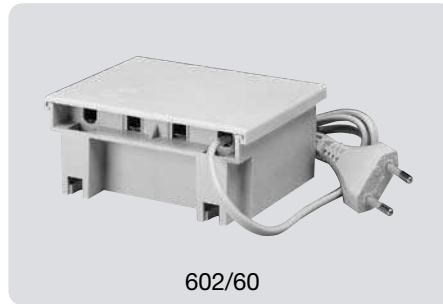


Triax power supplies

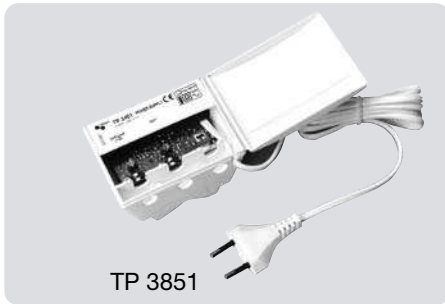

Technical data on Triax power supplies

TYPE		TP 3851	TP 3852	601/60B	602/60B	P601/100	P602/100	651/350
Art. No.		332303	332304	336106	336121	336362	336363	336350
Band		VHF/UHF	VHF/UHF	VHF/UHF	VHF/UHF	VHF/UHF	VHF/UHF	VHF/UHF
Frequency range	MHz	47-860	47-860	47-860	47-860	47-860	47-860	47-860
Inputs	pcs	1	1	1	1	1	1	1
Outputs	pcs	1	2	1	2	1	2	1
Through loss	dB	0.5	4.0	1.0	4.0	1.0	4.0	1.0/1.5
Voltage	V/DC	+ 12	+ 24	+ 24	+ 24	+ 24	+ 24	+ 24
Max. power	mA/DC	85	85	60	60	100	60	350
Main voltage	V/AC	230	230	230	230	230	230	230
Power	W	2.6	2.6	4.0	4.0	8.0	8.0	15.0
Connectors		S&C	S&C	S&C	S&C	S&C	S&C	S&C
Certification		CE	CE	CE	CE	CE	CE	CE
Impedance	Ohm	75	75	75	75	75	75	75
Weight	kg	0.2	0.2	0.25	0.25	0.25	0.25	
Dimensions (h x d x w)	mm	69x55x94	69x55x94	90x48x115	90x48x115	90x48x115	90x48x115	
Remarks								