

SMT/THM TEST POINTS

Designer's Choice




(SMT) SURFACE MOUNT TEST POINTS ON TAPE & REEL



MINIATURE

- Ultra low profile ideally suited for advanced surface mount printed circuit board applications
- Designed for long life and durability
- Manufactured using flat wire to provide a large mounting surface area
- Ideal for use with miniature probes, clips, and hooks
- Efficient, safe, board level testing




SPECIFICATIONS

Contact Material: .010 Phosphor Bronze
Contact Finish: Tin Lead
Tape Material: 8mm wide; 4mm pitch; conductive polycarbonate carrier tape meets ANSI/EIA-481 standard
Reel Size: 7 inches – 1000 pieces per reel


CAT. NO. 5015 (Tape & Reel)

Pad Layout



COMPACT

- Unique design provides exceptional strength and durability
- Simplifies testing on dense SMT circuit boards
- Ideal for use with most standard probes, clips and hooks
- Efficient, safe, board level testing




SPECIFICATIONS

Contact Material: .015 Phosphor Bronze
Contact Finish: Tin Lead
Tape Material: 12mm wide; 4mm pitch; conductive polycarbonate carrier tape meets ANSI/EIA-481 standard
Reel Size: 7 inches – 1000 pieces per reel


CAT. NO. 5016 (Tape & Reel)

Pad Layout




(THM) THRU-HOLE MOUNT TEST POINTS – COLOR KEYED

- Color keyed for visibility and quick identification
- Economical choice for PC test point terminations
- Snap-fit mounting provides positive retention for wave soldering
- Wire form loop for safe, non-slip testing
- Space saving, ultra low and low profile designs
- High profile design for difficult to reach applications
- Suitable for high density packaging on .062 and .093 PC boards
- Practical replacement for wire-wrap posts and turrets
- Secure grip for J hooks, EZ hooks, grabbers, alligator clips, tips or probes
- Plastic base strengthens terminal for positive holding power
- Ideal for reliable production testing and field service troubleshooting

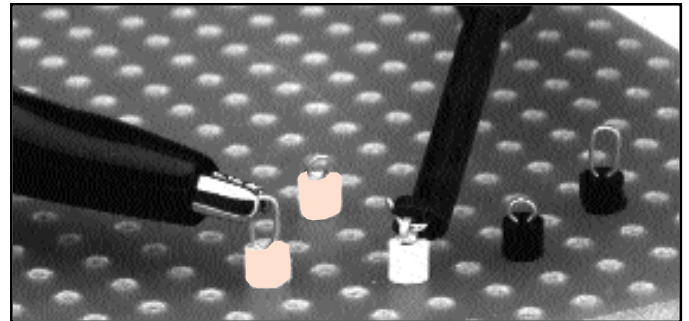

MINIATURE



CAT. NO.	BASE COLOR
5000	RED
5001	BLACK
5002	WHITE
5003	ORANGE
5004	YELLOW


SPECIFICATIONS

Terminal: .010 x .020 Phosphor Bronze Wire, Tin Plate
Base: Glass Filled Nylon, UL 94V-0

MOUNTING DETAIL

Mtg. Hole: .040 Diameter

COMPACT



CAT. NO.	BASE COLOR
5005	RED
5006	BLACK
5007	WHITE
5008	ORANGE
5009	YELLOW


SPECIFICATIONS

Terminal: .015 x .032 Phosphor Bronze Wire, Tin Plate
Base: Valox, UL 94V-0

MOUNTING DETAIL

Mtg. Hole: .063 Diameter
Mtg. Centers: .125 x .125

MULTIPURPOSE



CAT. NO.	BASE COLOR
5010	RED
5011	BLACK
5012	WHITE
5013	ORANGE
5014	YELLOW

SPECIFICATIONS

Terminal: .015 x .032 Phosphor Bronze Wire, Tin Plate
Base: Valox, UL 94V-0

MOUNTING DETAIL

Mtg. Hole: .063 Diameter
Mtg. Centers: .125 x .125