


KEMET Part Number: ALC80A472DF100
(A547EH472M100A)

ALC80, Aluminum Electrolytic, 4,700 uF, 20%, 100 VDC, -40/+105°C

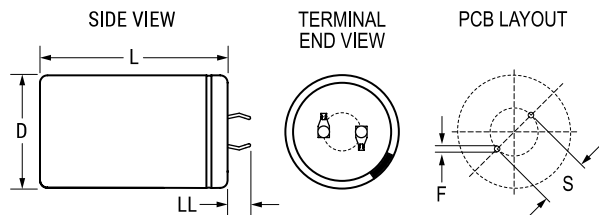

Dimensions

Dimension	Value
D	35mm +1mm
L	50mm +/-2mm
S	10mm +/-0.1mm
LL	6.3mm +/-1mm
F	2mm +/-0.1mm

Packaging Specifications

Weight:	80 g
Packaging:	Bulk, Bag

General Information

Series:	ALC80
Dielectric:	Aluminum Electrolytic
Description:	Snap-In, Aluminum Electrolytic
RoHS:	Yes
Lead:	2 Pin
AEC-Q200:	No
Shelf Life:	156 Weeks

Specifications

Capacitance:	4,700 uF
Capacitance Tolerance:	20%
Voltage DC:	100 VDC, 115 VDC (Surge)
Temperature Range:	-40/+105°C
Rated Temperature:	105°C
Life:	8000 Hrs (Rated Voltage And Ripple Current At 105C), 13000 Hrs (Rated Voltage At 105C)
Resistance:	65 mOhms (100Hz 20C), 54 mOhms (10kHz 20C)
Ripple Current:	6.73 Amps (100Hz 105C), 9.03 Amps (10kHz 105C)
Leakage Current:	1410 uA (5min 20°C)